




# MRFP

## restyling pneumatic end feed

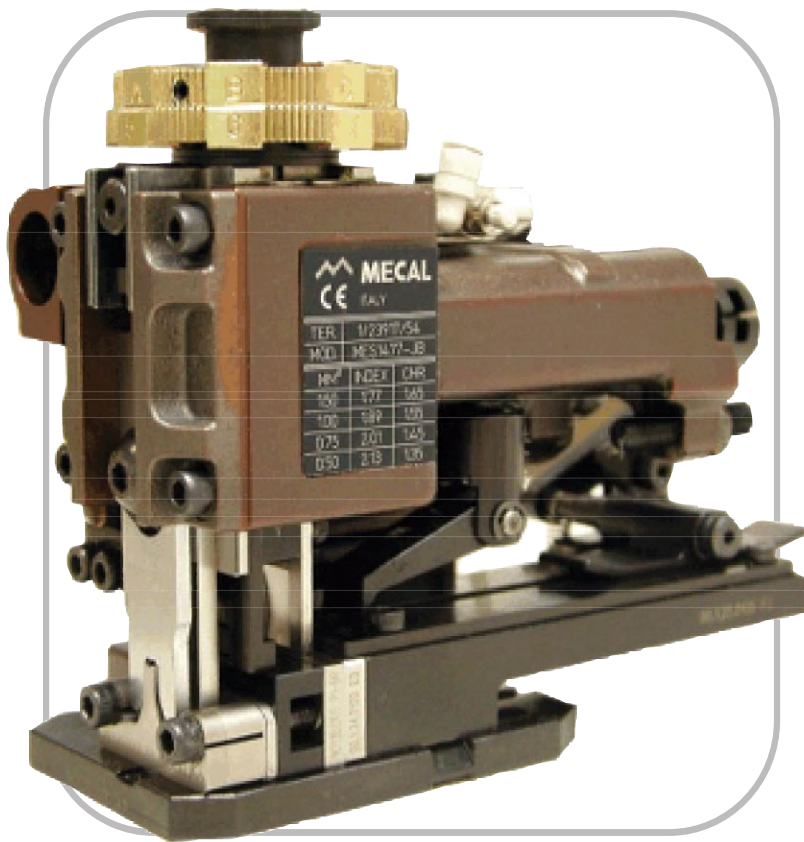

**DESCRIPTION:**

Restyling pneumatic end feed mini applicator

**CRIMPING HEIGHT:**

135.8mm (5.346")

**STROKE:**

40/30mm (1.575/1.18")

**TERMINAL PITCH:**

> 27 mm (>1.06") Max. stroke 41mm

**TERMINAL THICKNESS:**

< 1.2mm (<0.047")

**WIRE SECTION:**

max 10mm<sup>2</sup>

**FEEDING SYSTEM:**

air pressure 5/6 Bar

**WEIGHT:**

4.0 (8.8)

**DIMENSION MM:**

W 79.5 x H 145.5 x D 157

**DIMENSION ("):**

W 2.83" x H 5.72" x D 7.73"

**OPTION:**

Continuous regulating head.  
0.02mm(0.00078") resolution.  
2.7mm(0.106") range

- For terminals linked « end to end », rolled over a reel, with thickness < 1.2mm, terminal pitch 27-35 mm, wire section between 0 and 10mm<sup>2</sup>.
- Pneumatic end-feed feeding system. Can be supplied either with a continuous or a four-pad regulating head.
- Non-resettable 7-digit cycle counter, and with both cams either for terminal feeding on upstroke or downstroke.
- Fitted to any crimping press having a crimping height of 135.8mm ± 0.02mm
- Can be used in both manual and automatic configuration.
- Easy replacement of crimpers and anvils.