




# PSMCIO7

programmable stripping & crimping machine

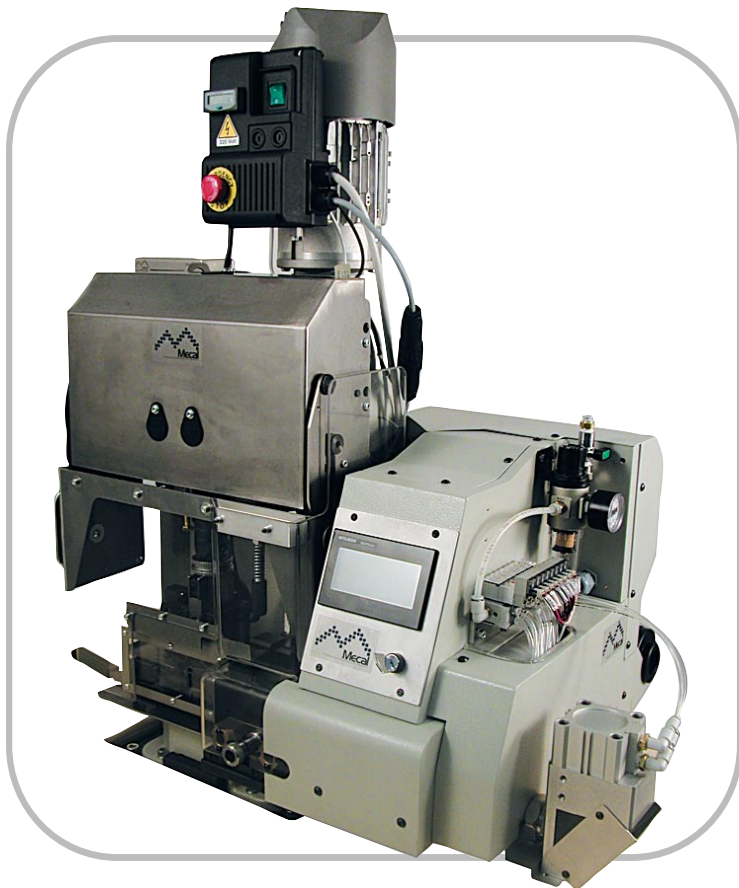

**PART NUMBER:**  
8Z3500800

**AIR PRESSURE:**  
5-7 bar

**DIMENSION (MM):**  
W 840 x H 880 x D 460

**DIMENSION ("):**  
W 33 x H 34.65 x D 18.11

**WEIGHT:**  
100 Kg (220 lb)

**POWER:**  
0.55 KW (0.75 HP) single phase

**POWER SUPPLY:**  
different arrangements available

**WIRE RANGE:**  
0.05 - 6.00 mm<sup>2</sup> (AWG 30 - 8)

**MAX INSULATION DIAMETER:**  
6 mm (0.23")

**MAX STRIPPING LENGTH:**  
12 mm (0.46")

**MIN JACKET STRIPPING LENGTH:**  
15 mm (0.59")

**MAX TRIMMING LENGTH:**  
4 mm (0.15")

**MAX BAD TERMINAL CUT OFF & ZERO CUT:**  
6 mm<sup>2</sup> (AWG 8)

**CYCLE TIME:**  
1.2 sec (5mm stripping, trimming, crimping)

- Fully programmable wire stripping and crimping equipment.
- Open barrel terminal with left side or rear feeding.
- 135.8 mm shut height Mecal standard Applicator.
- Any Western or Asian styled Applicator with different shut height and stroke can be installed when using a dedicated Press set up (optional).
- State of the art features assure the highest quality crimping on a wide range of applications.
- Any wire from 0.05 to 6 mm<sup>2</sup> can be trimmed, stripped and cut off in case of faulty crimping.
- All stripping slugs are collected by means of a suction device into a little tank outside the machine.
- Highest flexibility and best performances on the market.