

Mecal


BY STARN



www.mecalbystarn.com

MRFP

restyling pneumatic end feed

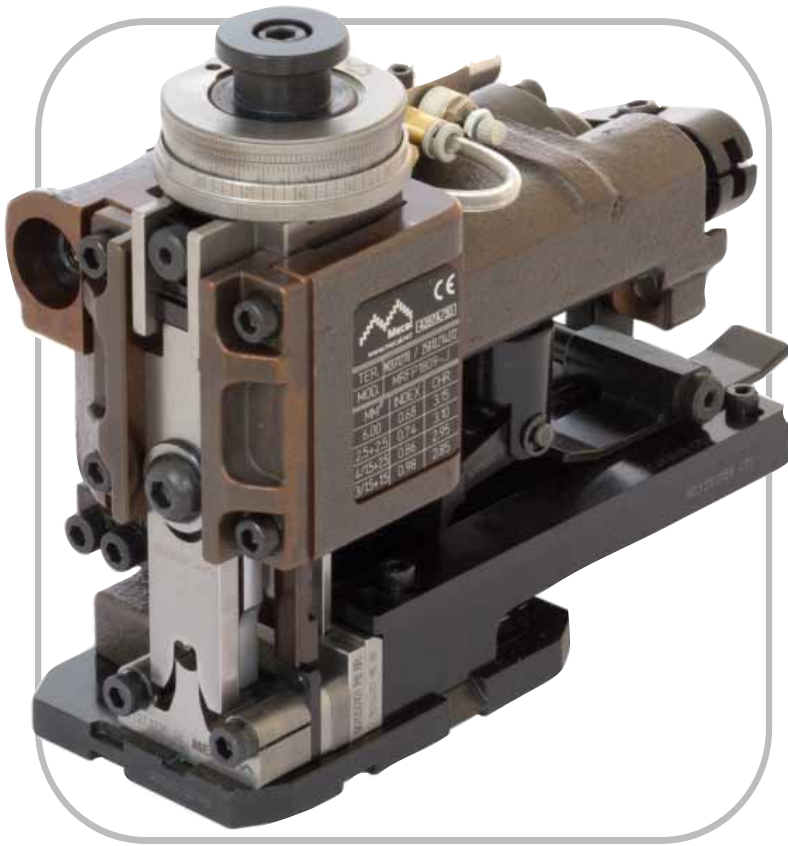

- For terminals linked end to end, rolled over a reel, with thickness < 1.2mm, terminal pitch 27-35 mm, wire section between 0 and 10mm².
- Pneumatic end-feed feeding system. Can be supplied either with a continuous or a four-pad regulating head.
- Non-resettable 7-digit cycle counter, and with both cams either for terminal feeding on upstroke or downstroke.
- Fitted to any crimping press having a crimping height of 135.8mm (+/-) 0.02mm.
- Can be used in both manual and automatic configuration.
- Easy replacement of crimpers and anvils.

DESCRIPTION:

Restyling pneumatic end feed mini applicator

CRIMPING HEIGHT:

(5.346") 135.8mm

STROKE:

(1.575/1.18") 40/30mm

TERMINAL PITCH:

(>1.06") > 27 mm
Max. stroke 41mm

TERMINAL THICKNESS:

(<0.047") < 1.2mm
max 25mm²

WIRE SECTION:

max 10mm²

FEEDING SYSTEM:

air pressure 5/6 Bar

WEIGHT:

(8.8 lb) 4.0 Kg

DIMENSION (MM):

W 79.5 x H 145.5 x D 157

DIMENSION ("):

W 2.83" x H 5.72" x D 7.73"

CONTINUOUS REGULATING HEAD

(0.00039") 0.01mm resolution.
(0.106") 2.7mm range